



TYPICAL APRON


- NOTES
1. If Apron Length Or Width Exceeds 100 ft., An Anchor Trench Shall Be Installed In The Middle Of The Apron Or At 100 ft. Max. Interval.
 2. Leave Slack In The Fabric For Expansion. Minimum Shall Be 1% (1'per 100 ft.) In Both Directions
 3. Install Fence In Accordance With S.C.S Specification 382 Fencing.
 4. Design Of Catchment Shell Be In Accordance S.C.S. Standard 636 - Water Harvesting Catchments.

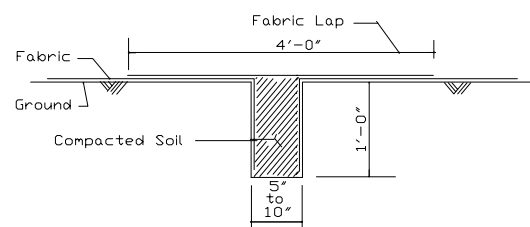


Typical Anchor Trench

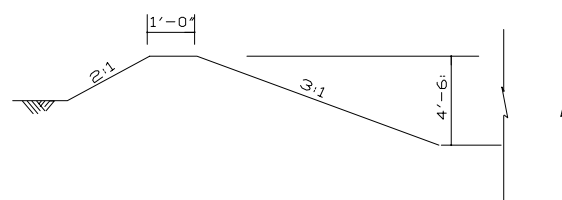

Typical Section (Upper Dike)

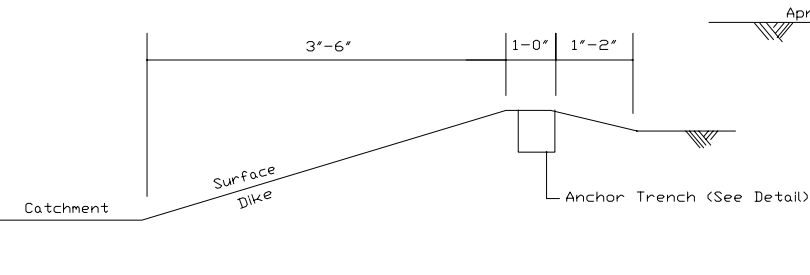

Typical Section (Side Dike)

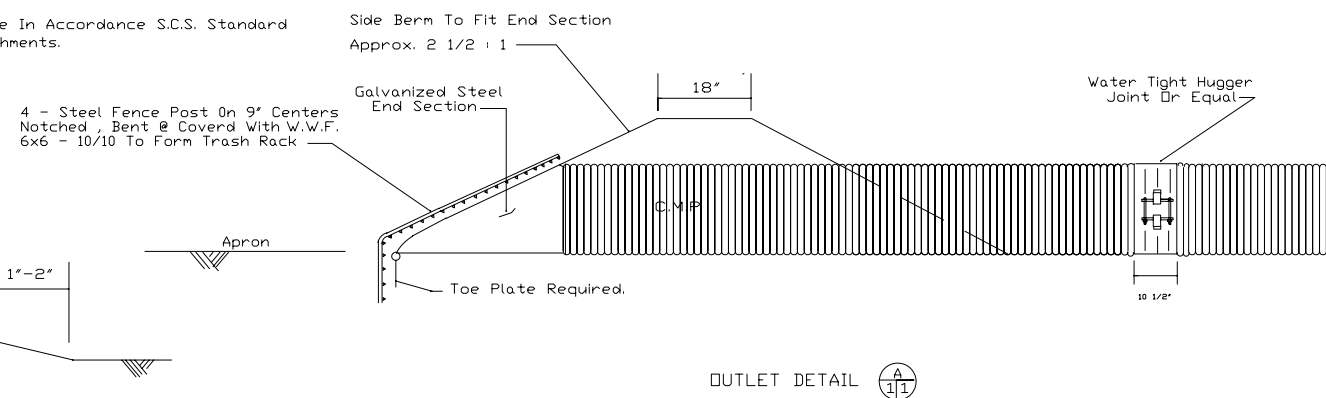

OUTLET DETAIL A 3/1

Date	1977
Designed	
Drawn	1977
Drawn	1989
Approved	

ASPHALT FABRIC --WATER HARVESTING CATCHMENT

PROJECT

COUNTY, STATE

USDA NRCS
Natural Resources Conservation Service

File No.
77019_WtrCatchmt.dwg
Drawing No.
77019

Sheet 01 of 01